


TYP	PMS 115	PMS 130	PMS 150	PMS 170	PMS 190	PMS 210	
Total bredd	1350	1500	1700	2000	2200	2400	mm
Arbetsbredd	1150	1300	1500	1700	1900	2100	mm
Vingens höjd	660	660	660	660	660	660	mm
Skär	Gummi		Stål	Vulkollan			
Dämpning mot stötar							
Vikt	142	148	153	158	163	170	kg



TYP	PVS 115	PVS 130	PVS 150	PVS 170	PVS 190	PVS 210	
Total bredd	1350	1500	1700	2000	2200	2400	mm
Arbetsbredd	1150	1300	1500	1700	1900	2100	mm
Vingens mitthöjd	610	610	610	610	610	610	mm
Vingens ytterhöjd	760	760	760	760	760	760	mm
Skär	Gummi		Stål	Vulkollan			
Dämpning mot stötar							
Vikt	170	178	186	201	214	243	kg



TYP	PDS 22-3	PDS 24-3	PDS 26-3	PDS 28-4	PDS 29-4	PDS 32-4	
Total bredd	2550	2780	3000	3200	3400	3700	mm
Arbetsbredd	2200	2400	2600	2800	2900	3200	mm
Antal segment	3	3	3	4	4	4	
Vingens höjd	800	800	1000	1000	1000	1000	mm
Skär	Gummi		Stål	Vulkollan			
Dämpning mot stötar							
Vikt	430	495	835	880	900	1050	kg

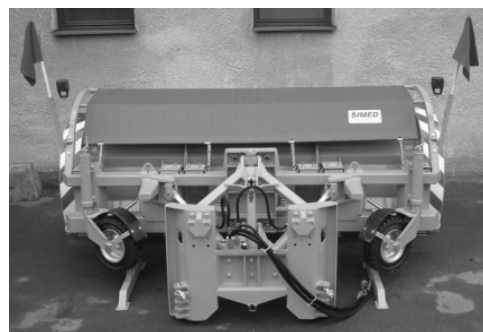

TYP	PSS 20	PSS 23	PSS 26	PSS 29	PSS 32	PSS 42	
Total bredd	2350	2700	3000	3400	3600	4860	mm
Arbetsbredd	2000	2300	2600	2900	3200	4200	mm
Vingens höjd	750	750	850	850	850	900	mm
Skär	Gummi		Stål	Vulkollan			
Dämpning mot stötar							
Vikt	510	580	685	720	820	1150	kg

